




lavamac

your laundry solution



Ironers



Lavamac is one of the leading manufacturers and suppliers of industrial laundry systems in the world. We give our customers complete solutions for all their laundry requirements through a solid dealer network.

In order to safeguard our quality only the best materials and construction methods are used to manufacture the Lavamac Industrial Flatwork Ironers. A heavy-duty robust frame and high grade painted steel ensure our customers years of trouble-free operation.

LAVAMAC WORLDWIDE

Lavamac laundry systems has a worldwide network of distributors in more than 100 countries. We are true laundry professionals who help you work out all your laundry requirements.

QUALITY ISO 9001 CERTIFIED

Lavamac is putting a lot of effort on quality and is constantly improving their standards in order to increase reliability. All Lavamac laundry equipment is accredited to the ISO 9001 quality standard and the CE standard.

USER-FRIENDLY

The conveyor belts can be stopped and restarted with foot control. Meanwhile the hands are free for feeding the linen into the Ironer. Even our largest drying ironers are designed to be operated by 1 person only.

FEATURES:

- Return feed and pass through ironers
- Standard chromed cylinders
- High quality NOMEX feeding and ironing belts
- Maximized coverage of the roll (300°)
- High output
- High quality length fold (LSRP range)
- Total integrated ironing systems (LSREP range)
 - Feeding
 - Length fold
 - Cross fold
 - Stacker
- Compact dimensions for easy installation
- All parts easy to reach for easy maintenance

LR - chest heated ironers

| Type | LR 2510 | LR 2512 | LR 2514 |
|-----------------------|-----------------|-----------------|-----------------|
| Roller diameter | 250 mm | 250 mm | 250 mm |
| Usefull roller length | 1000 mm | 1200 mm | 1400 mm |
| Heating | electrical | electrical | electrical |
| El. connection | 3x380-400V 50Hz | 3x380-400V 50Hz | 3x380-400V 50Hz |
| Electrical heating | 5 kW | 6 kW | 7 kW |
| Net weight | 100 kg | 118 kg | 126 kg |
| Dimensions HxWxD | 1005x1400x420 | 1005x1600x420 | 1005x1800x420 |



LR - chest heated ironers

| Type | LR 3016 | LR 3020 |
|-----------------------|-----------------|-----------------|
| Roller diameter | 300 mm | 300 mm |
| Usefull roller length | 1600 mm | 2000 mm |
| Heating | electrical | electrical |
| El. connection | 3x380-400V 50Hz | 3x380-400V 50Hz |
| Electrical heating | 13,2 kW | 16,8 kW |
| Net weight | 262 kg | 294 kg |
| Dimensions HxWxD | 1100x2200x500 | 1100x2600x500 |




LSR - cylinder heated drying ironers

| Type | LSR 3514 | LSR 3516 | LSR 3520 |
|-----------------------|--|--|--|
| Roller diameter | 350 mm | 350 mm | 350 mm |
| Usefull roller length | 1400 mm | 1600 mm | 2000 mm |
| Heating | electrical gas steam | electrical gas steam | electrical gas steam |
| Electrical connection | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz |
| Electrical heating | 17 kW | 25 kW | 29 kW |
| Net weight | 580 kg | 670 kg | 700 kg |
| Dimensions HxWxD | 1180x2150x875 | 1180x2350x875 | 1180x2750x875 |



LSR - cylinder heated drying ironers


| Type | LSR 5016 | LSR 5020 | LSR 5025 | LSR 5032 |
|-----------------------|--|--|--|--|
| Roller diameter | 500 mm | 500 mm | 500 mm | 500 mm |
| Usefull roller length | 1600 mm | 2000 mm | 2500 mm | 3200 mm |
| Heating | electrical gas steam | electrical gas steam | electrical gas steam | electrical gas steam |
| Electrical connection | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz |
| Electrical heating | 33 kW | 38 kW | 55 KW | 65 KW |
| Net weight | 920 kg | 1150 kg | 1290 kg | 1590 kg |
| Dimensions HxWxD | 1232x2350x992 | 1232x2750x992 | 1232x3350x992 | 1232x3950x992 |

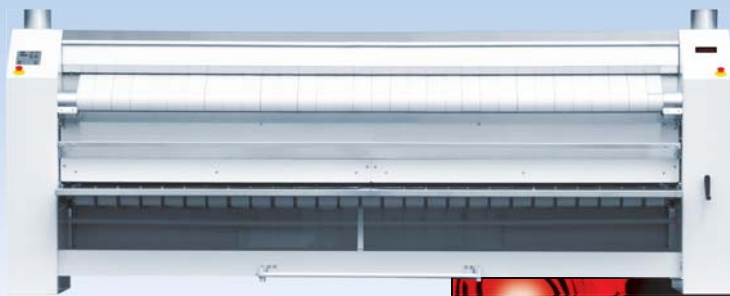

- Front or rear return
- Length folding

LSRP/LSRA - cylinder heated drying ironers

| Type | LSRP/LSRA 5020 | LSRP/LSRA 5025 | LSRP/LSRA 5032 |
|-----------------------|--|--|--|
| Roller diameter | 500 mm | 500 mm | 500 mm |
| Usefull roller length | 2000 mm | 2500 mm | 3200 mm |
| Heating | electrical gas steam | electrical gas steam | electrical gas steam |
| Electrical connection | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz |
| Electrical heating | 38 kW | 55 kW | 65 kW |
| Net weight | 1290 kg | 1440 kg | 1680 kg |
| Dimensions HxWxD | 1568x2750x1185 | 1568x3350x1185 | 1568x3950x1185 |

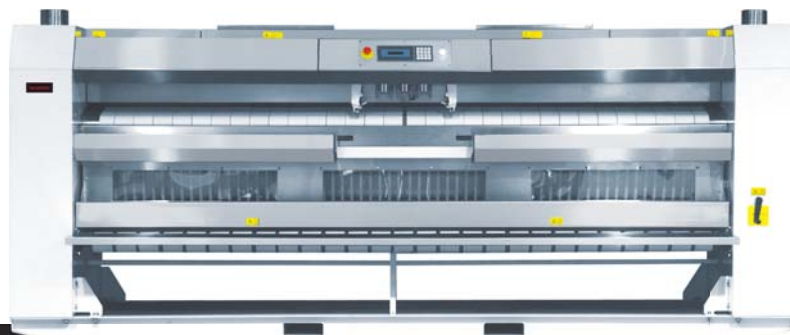

LSREP - cylinder heated drying ironers with feeder and length folder

| Type | LSREP 5020 | LSREP 5025 | LSREP 5032 |
|-----------------------|--|--|--|
| Roller diameter | 500 mm | 500 mm | 500 mm |
| Usefull roller length | 2000 mm | 2500 mm | 3200 mm |
| Heating | electrical gas steam | electrical gas steam | - gas steam |
| Electrical connection | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz |
| Electrical heating | 38 kW | 72 kW | - |
| Net weight | 1720 kg | 2180 kg | 2400 kg |
| Dimensions HxWxD | 1760x2850x1320 | 1760x3450x1320 | 1760x4050x1320 |

- Feeder
- Front or rear return
- Length folding

Crossfolder



- Connectable to LSREP ironers

Stacker



Cross folder and stacker - to match with ironer LSREP

| Type | 5025T | 5032T | 50E |
|-----------------------|------------------------------------|------------------------------------|------------------------------------|
| Connected ironer | LSREP5025 | LSREP5032 | LSREP5025 LSREP5032 |
| Electrical connection | 3X220-240V 50Hz 3X380-400V 50Hz | 3X220-240V 50Hz 3X380-400V 50Hz | 3X220-240V 50Hz 3X380-400V 50Hz |
| Net weight | 515 kg | 560 kg | 290 kg |
| Dimensions HxWxD | 1010x3430x870 | 1010x4020x870 | 1280x2750x1040 |

| TYPE | LR 2510 | LR 2512 | LR 2514 | LR 3016 | LR 3020 | LSR 3514 | LSR 3516 | LSR 3520 | LSR5016 | LSR 5020 | LSR 5025 | LSR 5032 | LSRP/LSRA 5020 | LSRP/LSRA 5025 | LSRP/LSRA 5032 | LSREP 5020 | LSREP 5025 | LSREP 5032 | |
|-----------------------------|---------|---|---------|---------|---------|----------|------------|------------|------------|------------|------------|------------|-------------------|-------------------|-------------------|---------------|---------------|---------------|------------|
| ROLLER | | | | | | | | | | | | | | | | | | | |
| Diameter | mm | 250 | 250 | 250 | 300 | 300 | 350 | 350 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 |
| ROLLER LENGTH | | | | | | | | | | | | | | | | | | | |
| Useful roller length | mm | 1000 | 1200 | 1400 | 1600 | 1600 | 1600 | 2000 | 2000 | 2000 | 2500 | 3200 | 2000 | 2500 | 3200 | 2000 | 2500 | 3200 | 3200 |
| CAPACITY | | | | | | | | | | | | | | | | | | | |
| Roller speed | m/min. | 3,9 | 3,9 | 4,1 | 4,1 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 | 1,5-8 |
| Output | kg/h | ca 12 | ca 14 | ca 18 | ca 25 | ca 30 | 32 | 40 | 37 | 50 | 70 | 90 | 50 | 70 | 90 | 50 | 70 | 90 | 90 |
| ELECTRICAL HEATING | | | | | | | | | | | | | | | | | | | |
| Electrical heating | kW | 5 | 6 | 7 | 13,2 | 16,8 | 17 | 25 | 29 | 33 | 38 | 55 | 65 | 38 | 55 | 65 | 38 | 72 | - |
| Electrical connection | | 3x380-400V 50Hz 3x208-240V 50/60Hz 3x380-415V+N 50/60Hz | | | | | | | | | | | | | | | | | |
| GAS HEATING | | | | | | | | | | | | | | | | | | | |
| Gas heating | kW | - | - | - | - | 26 | 30 | 30 | 30 | 36 | 52 | 66 | 36 | 52 | 66 | 36 | 52 | 66 | 66 |
| Connection | inch | - | - | - | - | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| STEAM HEATING | | | | | | | | | | | | | | | | | | | |
| Steam heating | kg/h | - | - | - | - | 27 | 32 | 40 | 36 | 49 | 68 | 88 | 49 | 68 | 88 | 49 | 68 | 88 | 88 |
| Connection | inch | - | - | - | - | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| MOTOR | | | | | | | | | | | | | | | | | | | |
| Roller motor | kW | 0,18 | 0,18 | 0,18 | 0,48 | 0,67 | 0,37 | 0,37 | 0,37 | 0,37 | 0,37 | 0,37 | 0,37 | 0,37 | 0,37 | 0,98 | 1,2 | 1,2 | 1,2 |
| Fan motor | kW | - | - | - | 0,18 | 0,18 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 | 0,18/0,255 |
| DIMENSIONS | | | | | | | | | | | | | | | | | | | |
| Height | mm | 1005 | 1005 | 1005 | 1100 | 1100 | 1180 | 1180 | 1232 | 1232 | 1232 | 1232 | 1568 | 1568 | 1568 | 1760 | 1760 | 1760 | 1760 |
| Width | mm | 1400 | 1600 | 1800 | 2200 | 2600 | 2150 | 2350 | 2750 | 2750 | 3350 | 3950 | 2750 | 3350 | 3950 | 2850 | 3450 | 4050 | 4050 |
| Depth | mm | 420 | 420 | 420 | 500 | 500 | 875 | 875 | 992 | 992 | 992 | 992 | 1185 | 1185 | 1185 | 1320 | 1320 | 1320 | 1320 |
| PACKAGING DIMENSIONS | | | | | | | | | | | | | | | | | | | |
| Height | mm | 1150 | 1150 | 1150 | 1260 | 1260 | 1550 | 1550 | 1550 | 1550 | 1550 | 1550 | 1900 | 1900 | 1900 | 1990 | 1990 | 1990 | 1990 |
| Width | mm | 1480 | 1680 | 1880 | 2280 | 2690 | 2290 | 2490 | 2890 | 2490 | 2890 | 3490 | 2976 | 3576 | 4176 | 2990 | 3590 | 4190 | 4190 |
| Depth | mm | 500 | 500 | 500 | 590 | 590 | 970 | 970 | 1100 | 1100 | 1100 | 1100 | 1356 | 1356 | 1356 | 1370 | 1370 | 1370 | 1370 |
| WEIGHT | | | | | | | | | | | | | | | | | | | |
| Net | kg | 100 | 118 | 126 | 262 | 294 | 580 | 670 | 700 | 920 | 1150 | 1290 | 1290 | 1440 | 1680 | 1720 | 2180 | 2400 | 2400 |
| Packed weight: cardboard | kg | 119 | 130 | 145 | 300 | 350 | 730 | 840 | 900 | 1120 | 1350 | 1850 | 1520 | 1700 | 2000 | 1990 | 2460 | 2770 | 2770 |

www.lavamac.be

In the last few years, Lavamac has acquired a position as one of the market leaders as a manufacturer of industrial laundry equipment.

During the past couple of years, this market has known a strong evolution by which the market has moved from selling machines to offering „concepts“ and „solutions“.

Through an extended range of products connected to a strong know-how, Lavamac has taken advantage of this market tendency, through which they can be considered as one of the trendsetters as manufacturer of industrial laundry equipment.

Thanks to a team of more than 30 engineers, Lavamac is able to develop the necessary products on a pro-active basis and with lots of flexibility. This happens in close consultation with the clients.

Lavamac disposes of one of the most complete ranges in the industry.

- Normal spin washer extractors
- High spin rigid mounted washer extractors
- High spin soft mounted washer extractors
- Dryers
- Rotary ironers
- Cylinder heated flatwork ironers
- Cylinder heated flatwork ironers with integrated feeders and folders

This range enables Lavamac to offer tailor made solutions to every market segment.

As leading market segments we can distinguish:

- Coin-operated shops
- Apartment buildings
- Drycleaning shops
- On premise laundries (hospitals, hotels, sportsclubs, restaurants, etc.)
- Commercial laundries
- Ships (both cargo and cruiseliners)
- Mops

All the machines are carefully tested with linen to make sure that all Lavamac products meet the highest quality standards.

AUTHORISED LAVAMAC DEALER

